


Florida Mountain: Alpine Vein LS (looking East)

Drill Hole Number	From (m)	To (m)	Interval (m) ⁽¹⁾	g/t Au ⁽²⁾	g/t Ag ⁽²⁾	g/t AuEq ⁽³⁾
FME-20-085	2.13	87.48	85.35	4.53	262.67	7.91
<i>Incl:</i>	3.66	34.14	30.48	11.74	652.45	20.14
FME-20-087	342.75	344.12	1.37	1.76	347.37	6.23
FME-20-088	330.40	332.84	2.44	13.36	13.04	13.53

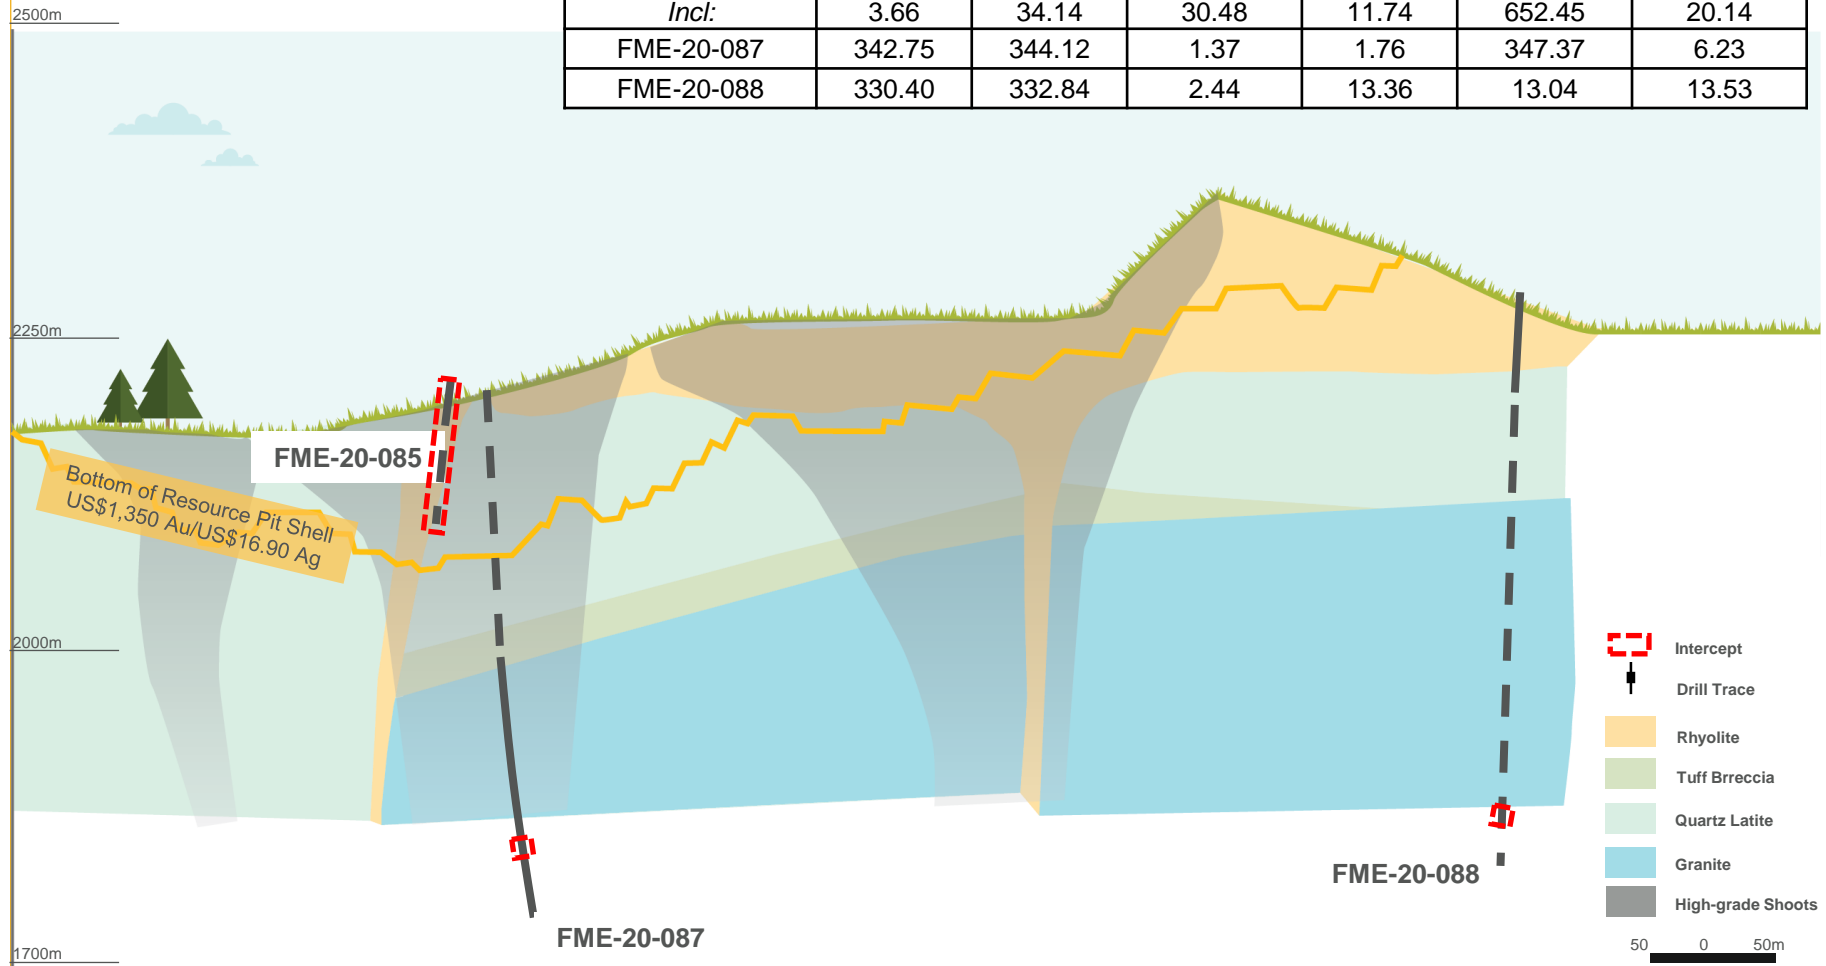

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Intervals reported are uncapped
- (3) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$