



War Eagle Cross Section: B-B

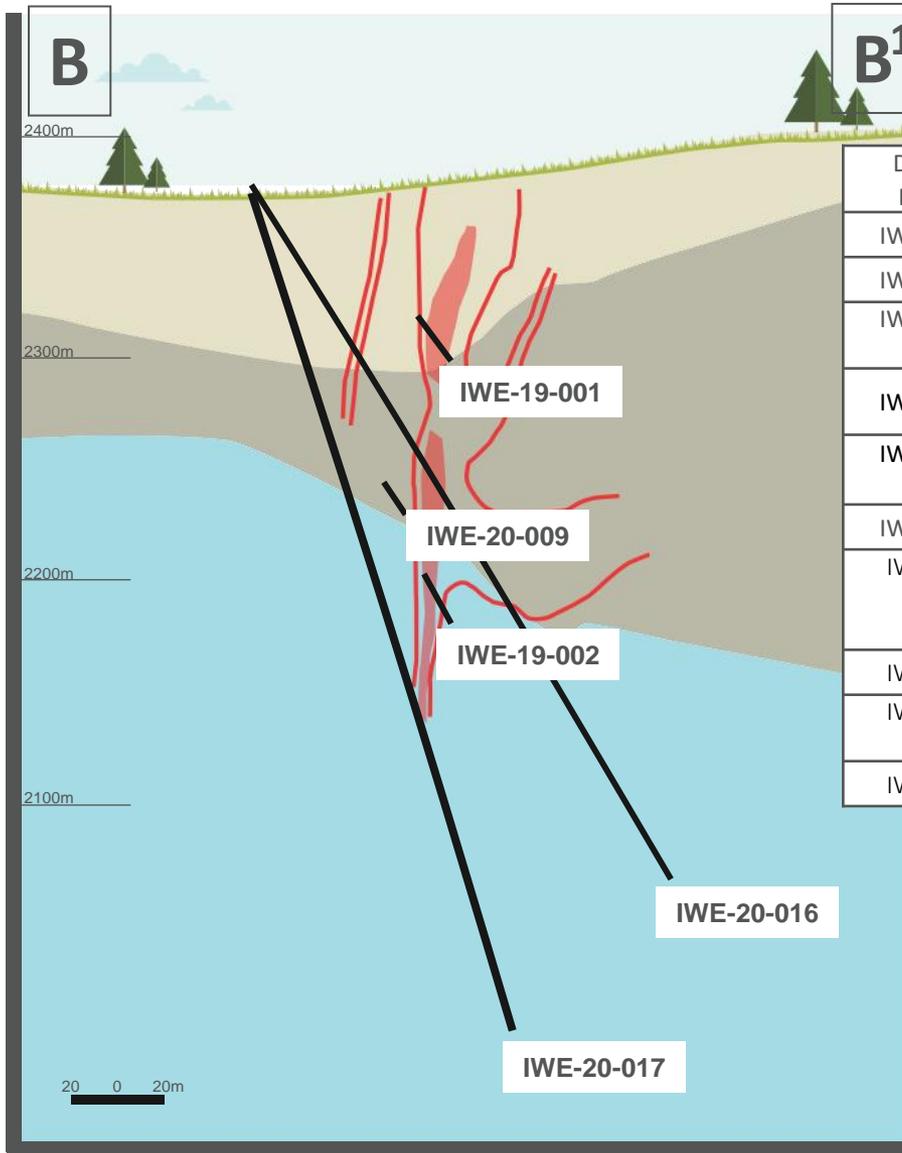

Drill Hole Number	From (m)	To (m)	Interval (m) ⁽¹⁾	g/t Au ⁽³⁾	g/t Ag ⁽³⁾	g/t AuEq ⁽²⁾
IWE-20-009	103.33	104.39	1.07	3.51	12.00	3.66
IWE-20-009	156.36	157.89	1.52	4.09	15.80	4.29
IWE-20-009	167.03	177.70	10.67	1.01	7.42	1.10
Incl:	167.03	168.55	1.52	2.99	28.43	3.36
IWE-20-016	121.01	121.62	0.61	4.53	9.63	4.65
IWE-20-016	182.27	212.90	30.63	1.19	11.65	1.34
Incl:	209.70	211.23	1.52	8.46	9.11	8.57
IWE-20-017	209.70	211.23	1.52	21.85	76.39	22.84
IWE-19-01	116.74	150.88	34.14	10.88	115.31	12.37
Incl:	116.74	121.01	4.27	73.62	817.26	84.14
Incl:	147.83	150.88	3.05	9.93	48.34	10.55
IWE-19-01	315.16	317.30	2.13	6.03	269.33	9.50
IWE-19-02	172.82	196.14	23.32	1.40	51.42	2.06
Incl:	194.16	195.38	1.22	8.32	713.73	17.51
IWE-19-02	87.48	88.70	1.22	2.32	0.83	2.33

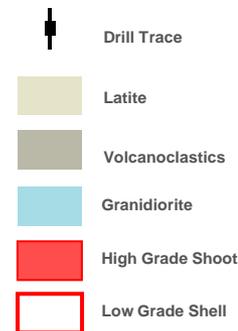

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$
- (3) Intervals reported are uncapped