


Florida Mountain: Stone Cabin – Tip Top Veins LS (looking East)

Drill Hole Number	From (m)	To (m)	Interval (m) ⁽¹⁾	g/t Au ⁽²⁾	g/t Ag ⁽²⁾	g/t AuEq ⁽³⁾
FME-20-086	97.84	220.98	123.14	0.55	18.16	0.79
<i>Incl:</i>	218.24	219.46	1.22	9.98	16.43	10.19
FME-20-093	34.66	36.27	1.61	8.61	479.00	14.78
FME-20-093	166.42	167.03	0.61	4.32	4.11	4.373

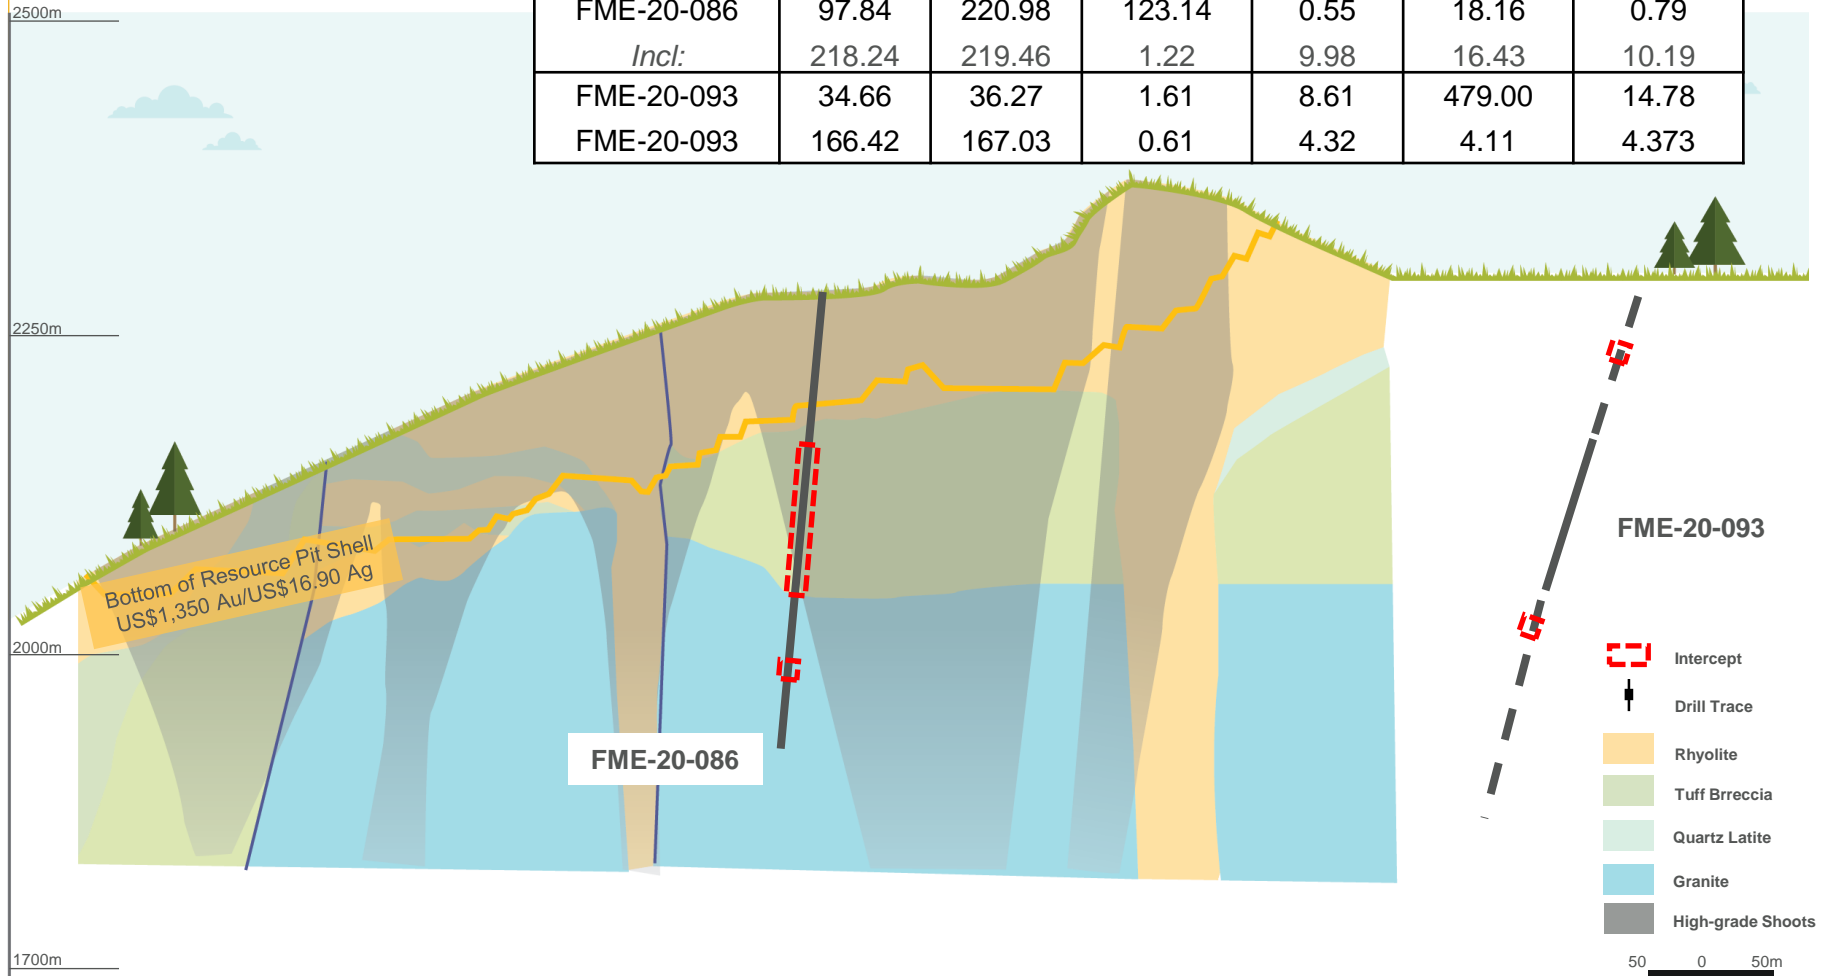

- (1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
- (2) Intervals reported are uncapped
- (3) Gold equivalent = $g \text{ Au/t} + (g \text{ Ag/t} \div 77.70)$