


Florida Mountain: Cross Section DDH (Looking North)

| Drill Hole | From (m) | To (m) | Interval (m) ⁽¹⁾ | g/t Au ⁽³⁾ | g/t Ag ⁽³⁾ | g/t AuEq ⁽²⁾ |
|------------|----------|--------|-----------------------------|-----------------------|-----------------------|-------------------------|
| FME-21-107 | 41.30 | 42.43 | 1.13 | 2.16 | 27.58 | 2.52 |
| FME-21-107 | 126.19 | 139.60 | 13.41 | 0.96 | 6.52 | 1.04 |
| FME-21-111 | 158.19 | 181.66 | 23.47 | 0.82 | 23.31 | 1.12 |
| FME-21-116 | 327.81 | 328.73 | 0.92 | 4.28 | 1,689 | 26.02 |
| FME-21-118 | 249.63 | 256.34 | 6.71 | 3.20 | 790.50 | 13.37 |
| Incl: | 250.24 | 251.00 | 0.76 | 27.04 | 6631 | 112.38 |
| FME21-118 | 303.58 | 314.25 | 10.67 | 0.58 | 128.91 | 2.24 |

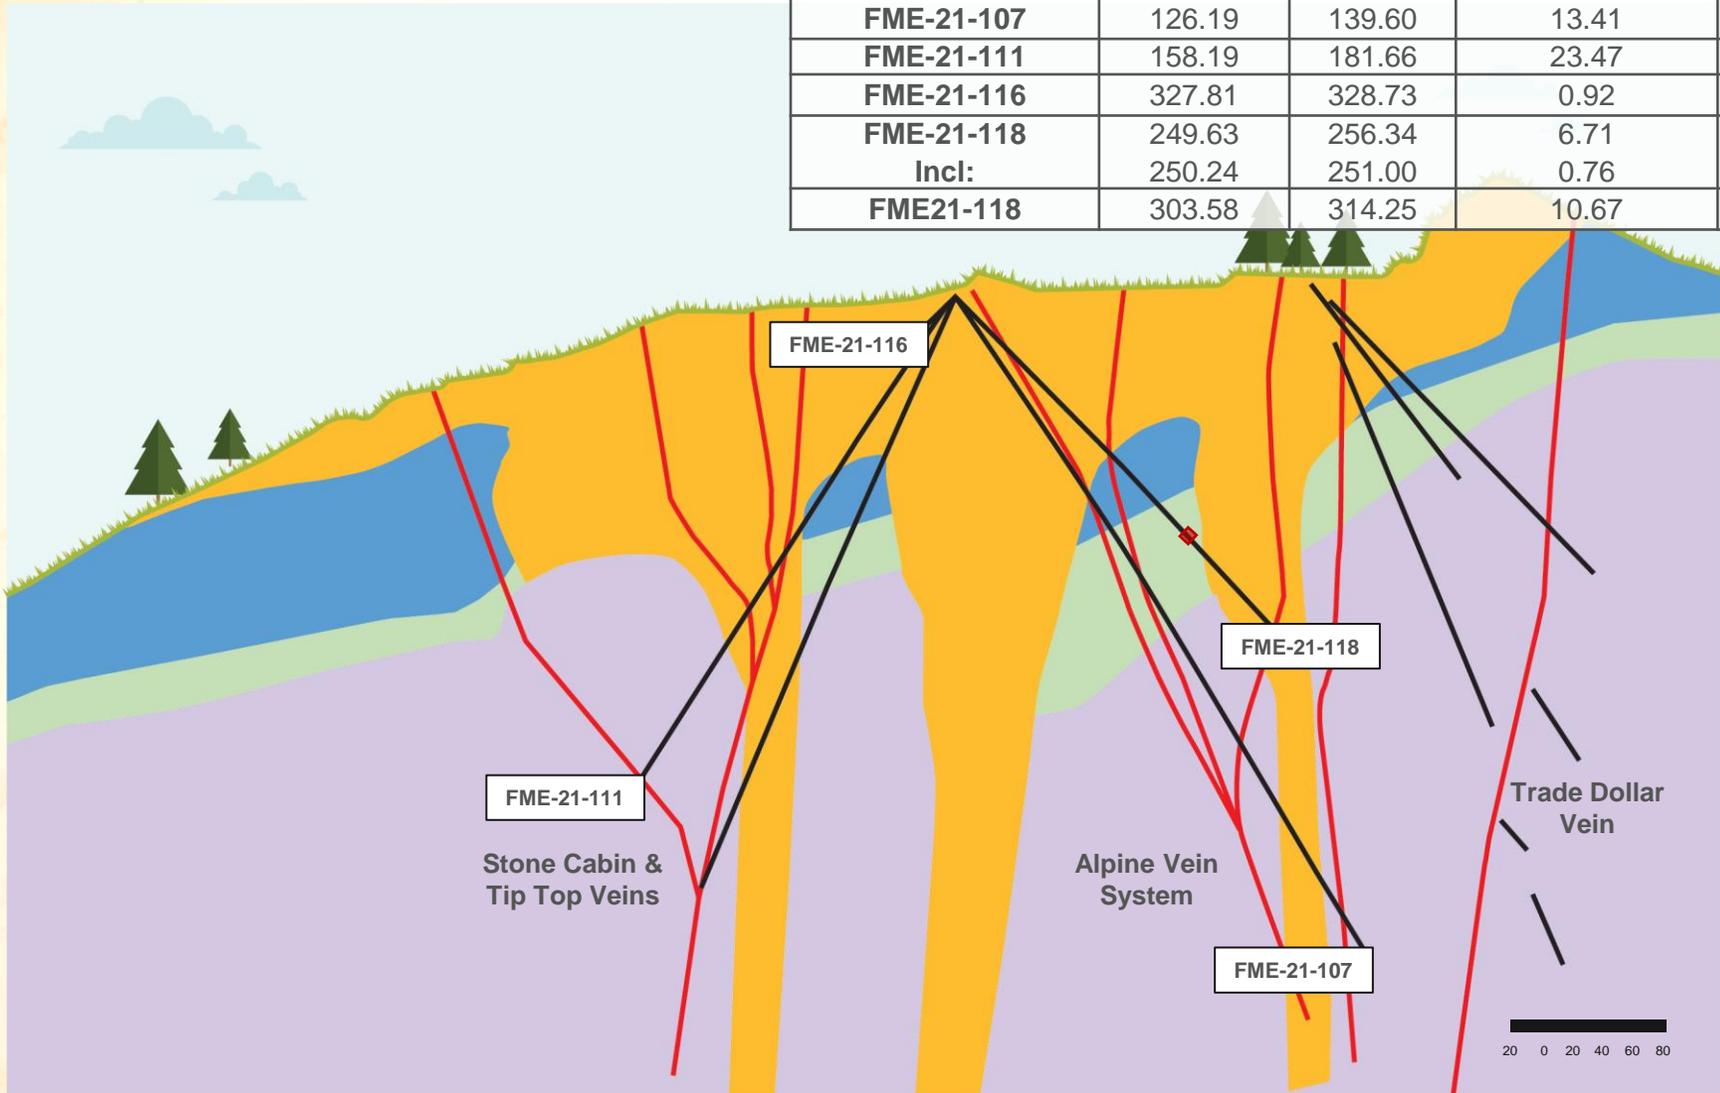

(1) Downhole thickness; true width varies depending on drill hole dip; most drill holes are aimed at intersecting the vein structures close to perpendicular therefore true widths are close to downhole widths (approximately 70% conversion ratio)
 (2) Gold equivalent = g Au/t + (g Ag/t ÷ 77.70)
 (3) Intervals reported are uncapped